

# Technical features

## Digital clock

## Style 5S

### Description :

- ▶ Led clock for indoor installation.
- ▶ Hour - minute - second display.
- ▶ Fixed or alternate time with date or week number display, or timer display.
- ▶ Height of digit 5 cm, readability 20 metres.
- ▶ Led colours : red, green, yellow.
- ▶ Models : independent / 24V minute impulse receiver and IRIG-B/AFNOR coded time receiver.



### Technical features :

- ▶ Injected ABS case black (IP30) with diffusing filter.
- ▶ Adjustable brightness (4 levels).
- ▶ Angle of vision 120°.
- ▶ 12 or 24 hour display mode.
- ▶ Automatic summer/winter time changeover and perpetual calendar.
- ▶ Data saving for 7 days.
- ▶ Accuracy of the time quartz base : 0,2 second/day.
- ▶ Silent operation.
- ▶ Programming and time setting through 2 buttons.
- ▶ Digit made of 7 segments with 3 Led each.
- ▶ Power supply 230V ±10%, 50/60 Hz.
- ▶ Consumption : 55 mA.
- ▶ Operating temperature : from -5 to 50°C.
- ▶ Weight : 1,1 Kg.

### Norms :

- ▶ Norm NF EN50081-1 : generic emission standard.
- ▶ Norm NF EN50082-1 : generic immunity standard.
- ▶ Norm NF EN60950 : safety of information technology equipment.

### Mounting Accessories :

- |  |         |
|--|---------|
| ▶ Double sided bracket   | 936 300 |
| ▶ Single sided bracket   | 936 301 |
| ▶ Chain for ceiling suspension (double sided clock)  | 936 302 |
| ▶ Wall plate support for style 5S recessed mounting  | 936 306 |
| For wall plate support, add to the reference : B for white casing colour, N for black or I for inox. |         |
| ▶ Timer control unit for counting up or down   | 936 400 |
| ▶ Embedded plate for control unit  | 936 405 |



### Led colours



### Style 5S with timer control unit



### Dimensions in mm

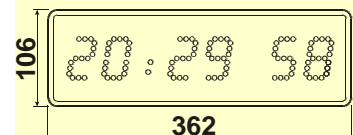

### Style 5S references

- |   |         |
|---|---------|
| ▶ Independent / 24V minute impulse receiver | 936 411 |
| ▶ IRIG-B/AFNOR coded time receiver          | 936 421 |

Indicate Led colour by choosing the last number of the reference : red (1), green (2), yellow (3).

