

Technical Features

Digital Theatre Timer

Style OP 5S

Description:

- ▶ LED clock for indoor installation.
- ▶ Principally used in operating theatres.
- ▶ Hour-minute-second or timer display.
- ▶ Height of digit 5 cm, readability 20 metres.
- ▶ LED colours: red.
- ▶ Stainless steel casing and keypad adapted to cleaning requirements.
- ▶ Models: independent / 24V minute impulse or IRIG-B/AFNOR coded time receiver.

Technical features of the clock:

- ▶ Stainless steel casing (IP54) with mineral glass protection.
- ▶ Flush mounting with 4 holes (screws not provided).
- ▶ Adjustable brightness (4 levels).
- ▶ Angle of vision: 120°.
- ▶ Silent operation.
- ▶ Programming and setting through 2 keys.
- ▶ Digit made of 7 segments with 3 LED each.
- ▶ Power supply : 230V \pm 10%, 50/60 Hz.
- ▶ Consumption: 55 mA.
- ▶ Operating temperature: -5 to 50°C.
- ▶ Weight: 3 Kg.



Technical features of the control unit:

- ▶ Chronometer hour - minute - second from 0 to 23:59:59.
- ▶ Flush mounting (screws not provided).
- ▶ Waterproof control unit with touch sensitive keys for an easy cleaning:
 - Time display key with LED indicator.
 - Chronometer display key with LED indicator.
 - Start/stop key: successive pressings to start or stop the chronometer.
 - Reset key: resetting to zero of the chronometer.
- ▶ Connection to the clock with a 2-pair telephone cable 0.5 mm. Max length: 20 metres.
- ▶ Supplied with power by the clock.
- ▶ The control unit can control up to 10 clocks.
- ▶ Operating temperature: 0 to 50°C.
- ▶ Protection index of the front face: IP 55.
- ▶ Weight: 255 g.

Norms:

- ▶ NF EN50081-1: generic emission standard.
- ▶ NF EN50082-1: generic immunity standard
- ▶ NF EN60950: safety of information technology equipment.

References:


- ▶ Style OP 5S red independent* / 24V impulse receiver 936211
- ▶ Style OP 5S red AFNOR 936221

* The Digital Theatre Timer can operate independently or as a slave.
If installed to operate independently, then manual synchronization
or Time Reset is done at the clock.



Ref. 643491 A

Control unit dimensions:

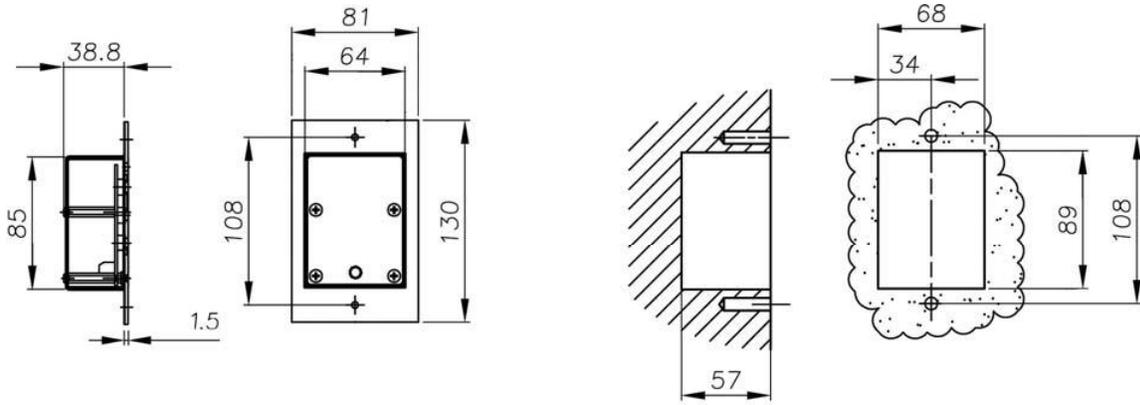

Clock dimensions:

